


A+++

KAISAI

GOO

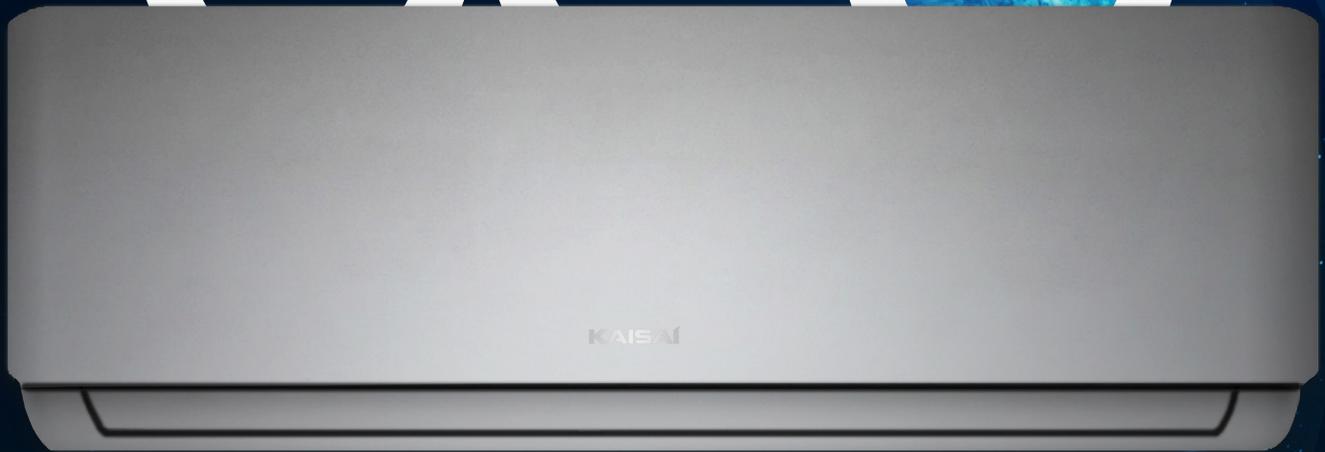

BIO HEPA
FILTER



COLD CATALYST
FILTER



AIR
IONIZATION

Highest energy efficiency class

The perfect combination of modern design and top energy efficiency class A+++ in cooling mode and A++ in heating mode.



WIFI MODULE
AS STANDARD



ECO-FREINDLY
REFRIGERANT R32



MULTIFUNCTIONAL
REMOTE CONTROL



WIDE TEMPERATURE
RANGE



COLD CATALYST FILTER

Using specialized filtration, the air conditioner not only cools and heats, but also effectively purifies the air. The cold-CATALYST filter removes chemicals such as carbon monoxide, hydrogen sulfide, ammonia, benzene and formaldehyde.



BIO HEPA FILTER

The air purification function is supported by a Bio HEPA filter that effectively traps 99% of dust particles, dust, and bacteria with a size of 0,3 µm and up to 95% of particles from 0,1 to 0,3 µm, including fungal cells and some viruses.



AIR IONIZATION

The ions emitted by the air conditioner break down dust mite particles, mold, bacteria and viruses, eliminating them from the environment. An additional effect of the air conditioner is moistening the air, which has a positive impact on the skin and gives a pleasant feeling of freshness in the air-conditioned room.

TECHNICAL SPECIFICATION - KAISAI GEO

MODEL	indoor unit		KGE-12GRGI	KGE-18GRGI
	outdoor unit		KGE-12GRGO	KGE-18GRGO
Average output. (min÷max)	cooling	kW	3,5(1,4÷4,3)	5,3(3,4÷5,9)
	heating	kW	3,8(1,1÷4,4)	5,6(3,1÷5,8)
Energy class	cool./heat		A+++/A++	A++/A+
SEER	medium	W/W	8,5	7,0
SCOP	medium	W/W	4,6	4,0
Aver.power consump. (min÷max)	cooling	W	977(130÷1650)	1550(560÷2050)
	heating	W	977(160÷1560)	1500(780÷2000)
Aver.working current (min÷max)	cooling	A	4,2(0,6÷7,2)	6,7(2,4÷9,0)
	heating	A	4,2(0,7÷6,8)	6,5(3,4÷8,7)
Air flow	indoor	m³/h	584/477/395	730/500/420
	outdoor	m³/h	2100	2200
Working temp. cooling/heating*	indoor	°C	17÷32/0÷30	17÷32/0÷30
	outdoor	°C	-15÷50/-25÷24	-15÷50/-25÷24
Sound pressure lvl	indoor	dB(A)	39,5/33/25/21	43/33,5/28/23
	outdoor	dB(A)	54,5	55,5
Net dimensions s/w/g	indoor	mm	802/297/189	965/319/215
	outdoor	mm	765/555/303	805/554/330
Transport dimensions s/w/g	indoor	mm	875/380/285	1045/410/305
	outdoor	mm	887/610/337	915/615/370
Net weight	indoor	kg	8,6	10,9
	outdoor	kg	26,7	33,5
Transport weight	indoor	kg	11,1	14,2
	outdoor	kg	29,1	36,1
Pipe dia. fluid/gas		mm	6,35/9,52	6,35/12,7
Max. installation length		m	25	30
Max. level difference		m	10	20
Power supply	outdoor	V/Hz/Ph	220÷240/50/1	220÷240/50/1
Protection	outdoor	A	10	16
Power cables	outdoor	No. of wires	3x1,5	3x1,5
Control wires	indoor - outdoor	x mm²	5x1,5	5x1,5
Factory refrig. charge	up to 5 LM	kg	0,62	1,1
Addit. refrig. charge	over 5 LM	g/m	12	12

* Additional electric heaters, compressor and condensate tray are required for heating operation at outdoor temperature below -15 °C.

THE SET INCLUDES



Indoor unit
KGE



Outdoor unit
KGE



Wireless remote control
RG66A



WiFi AS STANDARD

Thanks to the WiFi module, the air conditioner can be controlled by phone or tablet. It is possible to control the parameters of the device 24 hours a day from anywhere in the world



R32 REFRIGERANT

R32 has a low global warming potential (GWP), better cooling and heating performance than R410A. With 20% more volumetric capacity, the amount of refrigerant in the air conditioner can be smaller than before



MULTIFUNCTIONAL REMOTE CONTROL

Using the remote control, you can easily set the appropriate air parameters in the room. Additionally, the remote control is equipped with practical Functions such as: self-cleaning evaporator (SELF CLEAN), constant heating 8 °C (HEATING 8 °C), temperature sensor (FOLLOW ME).



WIDE TEMPERATURE RANGE

By using modern technology and the new refrigerant R32, the air conditioner can operate in a wide range of outdoor temperatures: from -15 to +50°C in cooling mode and from -25 to +30°C in heating mode.



3D AIR FLOW

The automatically controlled horizontal and vertical louvers of the air conditioner ensure optimum air circulation and an even temperature distribution in the room